

single phase
UPS

business range

from 1000 to 3000 VA

for your IT and industrial applications



Business 1000 VA



Business 2000/3000 VA




design features

- On-line technology, double conversion
- High voltage and frequency output quality
- Wide input voltage tolerance
- Auto Self Testing system
- Control and command LCD Display
- Easy to install, easy to use
- Serial port RS-232, USB, AS 400 & interface SNMP

Téco

Connections

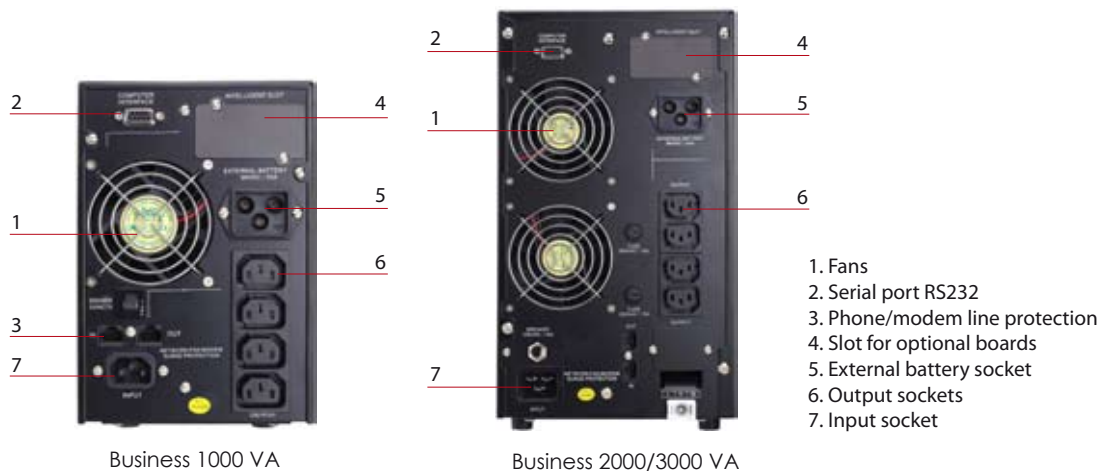

Communication

- LCD display for monitoring.
- RS 232 serial port
- Intelligent slot for USB port, SNMP card or AS 400.



Technical data

Power	VA/W	1000VA/700W	2000VA/1400W	3000VA/2100W
Input	input voltage	single phase 230 V AC (115-300 V AC)		
	frequency	50Hz ; 46~54Hz/60Hz ; 56~64 Hz		
	power factor	>0,98		
Output	output voltage	single phase 220/ (230) / 240 V AC		
	voltage regulation	± 1,5 %		
	frequency (battery mode)	50Hz/60Hz +/-0,2Hz		
	crest factor	3:1		
	overload	up to 130 % /30 secondes		
	battery capacity	12V - 7,2Ah	12V - 7,2Ah	12V - 7,2Ah
	backup times at 75% and 100% load	10/7 mn	17/10 mn	9/6 mn
Dimension and weight	D x W x H (mm)	400 x 145 x 220	460 x 192 x 340	460 x 192 x 340
	net weight (kgs) with batteries	14	34	35
Environment	noise level	45 dB	50 dB	
	temperature operation	0 - 40°C		
Communication	RS-232	RS-232 on DB9 connector		
	SNMP, USB, AS400	SNMP interface, dry contact interface and USB		
Compliance with standards	safety	EN 62040-1-1		
	EMC	EN 62040-2		

Enotec reserve the right to make any changes to data without prior notice.

AEG Eurolec

AEG Eurolec Consulting B.V.
Energieweg 128 - 3641 RT Mijdrecht
Tel. 0297 233333

www.aegeurolec.nl
info@aegeurolec.nl