


single phase
UPS

office LCD range

from 650 to 2000 VA

a compact and high-performance design
for Small Office and Home Office



design features

- Interactive line technology controlled by Microprocessor
- Voltage regulation thanks to integrated AVR (Automatic Voltage Regulation)
- Provide full protection, overload, short circuit
- Phone/fax/ modem Protection
- LCD display panel
- RS-232 and USB ports
- Compact and user friendly operation


Téco

Connections



Office LCD 650 VA

1. Input socket
2. Serial port RS232
3. Phone/modem line protection
4. Output sockets

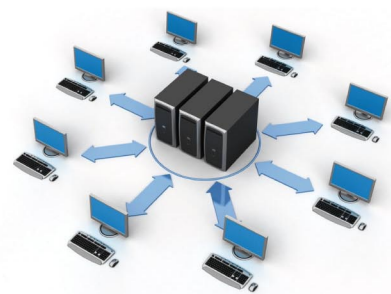

Communication

Serial and USB (option) ports for the control and automatic shutdown of applications.

Technical data

Power	VA	650 VA	1000 VA	1500 VA	2000 VA
Input	input voltage	160 - 270 V AC			
	frequency	50~60 Hz ± 10 %			
Output	output voltage	220/230 V AC			
	voltage regulation	± 10 %			
	frequency	50/60Hz			
	frequency stability	± 1 %			
	backup times	5 to 15 mns according to the load			
Protection	protection	short circuit and overload protection, phone/fax/modem protection			
	IP rating	IP 20			
Dimension and weight	D x W x H (mm)	335 x 95 x 157	350 x 120 x 195		410 x 145 x 215
	net weight (kgs)	5,3	10,5	11,5	15
Environment	noise level	45 dB			
	temperature and humidity operation	0 - 40 °C / 0 à 95% without condensation			
Communication	RS-232/USB	serial port RS-232 and USB (option)			
Standards	EMC/safety	EN 50091-2 / EN 50091-1			

Enotec reserve the right to make any changes to data without prior notice.

 **ENOTEC**

7 route de remich - L - 5650 MONDORF LES BAINS
 Tél. +352 26 30 26 67 - Fax +352 26 67 73 73
marketing@enotec-power.com