


**CABLE TYPE** : RG 59/U  
**SPECIFICATION** : MIL C-17  
**APPLICATION** : Used as connection cable in CATV,CCTV and Satellite and common antenna TV systems.  
**CONSTRUCTION** : 1x 0,83 mm Electrolytic copper conductor 3,90mm. Foam PE 100% AL-PES –AL coverage screen 85% braiding of tinned copper wire screen 6,40mm. White PVC outer sheath Cable weight 56 Kg/Km. Standart packing 100-500-1000m

**TECHNICAL DATA**

1 . Capacitance	: 61 pF/m.					
2 . Impedance	: 75+3 ohm					
3 . Velocity Ratio	: 0,78					
4 . Insulation Resistance	: > 2000 MOhm km					
5 . Working Temperature	: -40 0C+70 0C					
6 . Working Voltage	: 1,1 kV					
7 . Test Voltage	: 2,5 kV					
8 . Min. Bending Radius	: 10 xD					
9 . Attenuation :						
Frequency ( MHz)	100	200	400	600	800	1000
Attenuation (dB/100m)	9	13	14,5	20	28	31

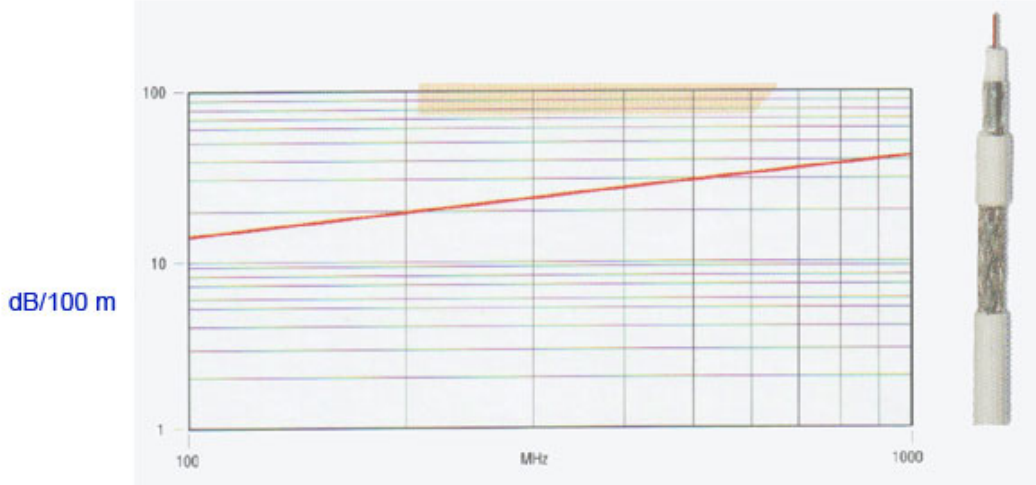

MHz